

# 20-Section Hydraulic Clamp Carrier



## Spec Sheet

**Quick Machinery Company**  
23905 Clinton Keith 114-243  
Wildomar, CA 92595  
Phone: (707) 272-6719  
Fax: (866) 399-1308



**Machine Type:**

**CLAMP CARRIER**

**Model Numbers:**

A-CCFH-08.5-20, B-CLMP-3.5-32, C-HCT1-08.5, D-PPF1-08.5, E-EMDR-20

**Description:**

8.5' width capacity (12.5' shown in photo above), 20-section Clamp Carrier with (6) heavy-duty, zinc-plated clamps per section (12 shown in photo above); clamps 32" opening, clamp jaws 3.5" high x 4.75" wide, with 1° inward draft.

Equipped with industrial-duty Hydraulic Clamp Tightener with adjustable torque limiter, Pneumatic overhead Panel Flattener with air pressure regulator and Electric Motor Drive with 1-button Fully Automatic Carrier Rotation Cycle.

Standard features include heavy-duty frame with 3" main shafts and 6" I-beam legs, foot levelers, hose tracks, coiled air lines, conduit-encased electrical wires, automatic air line oiler, high-quality urethane finish, toolbox with spare parts and tools.

**Dimensions:**

12'W x 11'D x 9'H

**Weight:**

Net: 9,400 lbs.; Shipping: 10,400 lbs. (compare!)

**Electrical Requirements:**

220V or 440V 3-ph; 12 amps @ 220V

**Air Requirements:**

5 cfm @ 90 psi (2 hp compressor)

**Price (U.S. Dollars):**

\$27,050.00 f.o.b. Los Angeles, CA

**Please Contact:**

Kevin Quick at Quick Machinery Company, 707-272-6719

# 20-Section Hydraulic Clamp Carrier



## High Production

The QUICK High-Production Clamp Carriers are the workhorses of the industry, designed for many years of multiple-shift production.

A standard 8 1/2' wide, 20-section QUICK Clamp Carrier with smooth, quiet, torque-limited, push-button Hydraulic Clamp Tightener, Pneumatic Panel Flattener and Electric Motor Drive is capable of producing over 450 edge-glued panels per shift (3 panels per section x 20 sections x 8 hours). A 40-section machine can produce over 900 panels per shift.



QUICK High Production Clamp Carriers are available in widths (maximum stock length capacities) of 6.5', 8.5' (standard), 10.5', 12.5' or 16.5', and 20, 30, 40, 60 or 80 sections. Machines can be outfitted with either one or two sets of Clamp Tighteners (Pneumatic or Hydraulic) and Panel Flatteners. A 20-Section Carrier can be expanded to 30 sections at a later date, and a 30-Section Carrier can be expanded to 40 sections, if desired.

## Massive Frame

Our High Production Clamp Carrier frames are the heaviest, strongest and stiffest in the industry. 20-section and larger frames have oversize frame rails and runways, massive 3" diameter front and rear shafts (large-diameter shafts resist twisting when the Clamp Carrier is being indexed from section to section by the drive motor), big cast iron sprockets, heavy-duty chains with 2" wide rollers, and extra-stout 6" I-beam legs.




## Super Heavy-Duty Clamps

Our industrial-duty, corrosion-resistant, zinc-plated clamps have 1" x 2" rails and huge 20mm (over 3/4") screws for super strength and durability. Each clamp weighs over 30 pounds!

The standard clamp jaws are 4-3/4" wide by 3-1/2" high, and each is angled inward one degree to keep stock held down securely in the clamps. Clamp jaws are available up to 6" high.

Clamps are available from 32" to 52" maximum opening.

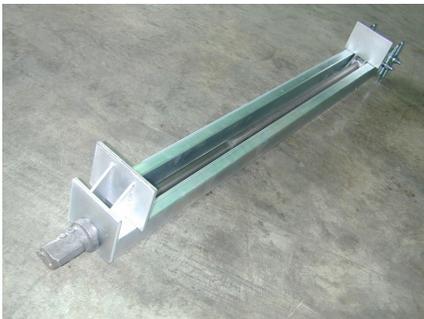

Value Leader in Gluing Equipment

## Quick Machinery Company

23905 Clinton Keith 114-243, Wildomar, CA 92595

Phone: (707) 272-6719, Fax: (866) 399-1308

E-mail: [kevin@quickmachinerycompany.com](mailto:kevin@quickmachinerycompany.com)

[www.quickmachinerycompany.com](http://www.quickmachinerycompany.com)